

明 证

CERTIFICATE

本证明之附件是向中国专利局作为受理局提交的下列国际申请副本 THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY OF THE BELOW IDENTIFIED INTERNATIONAL APPLICATION THAT WAS FILED WITH THE CHINESE PATENT OFFICE AS RECEIVING OFFICE

国际申请号:

PCT/CN03/00824

INTERNATIONAL APPLICATION NUMBER

国际申请日:

27 SEP 2003 (27.09.03)

INTERNATILNAL FILING DATE

发 明 名 称: METHOD AND SYSTEM OF PARTIAL POTTING HEAD

TITLE OF INVENTION

SLIDER TO HEAD SUSPENSION

申 人: SAE MAGNETICS(H.K.)LTD.

APPLICANT

中华人民共和国国家知识产权局局长 COMMISSIONER OF THE STATE INTELLECTUAL PROPERTY OFFECE OF THE PEOPLE'S REPUBLIC OF CHINA

二零零三年十一月十三日 NOVEMBER 13, 2003



PCT

REQUEST

The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty.

	For	receivin	g Office t	ise only
	national Applicatio	PCT	'/CN 0	3/00824
Inter	2 7	SEP	2003	(2 7. 0 9. 0 3)
Nam	RO/ON	中华人 PCT In	民共和国 ternatio	日家かり方がほう ro! Accuse or i

·	(if desired) (12 characte	ers maximum) FPEL03150033
BOX NO. I TITLE OF INVENTION METHOD AND SYSTEM OF PARTIAL POTTIN	G HEAD SLIDER	TO HEAD SUSPENSION
Box No. 11 APPLICANT This person	n is also inventor	
Name and address: (Family name followed by given name; for a legal enti The address must include postal code and name of country. The country of th Box is the applicant's State (that is, country) of residence if no State of residenc	he address indicated in this	Telephone No.
SAE MAGNETICS (H. K.) LTD. SAE Tower,	Facsimile No.	
38-42 Kwai Fung Crescent Kwai Chung N. T.		Teleprinter No.
Hong Kong Special Administrative Region, P. R. of China		Applicant's registration No. with the Office
State (that is, country) of nationality:	State (that is, country)	of residence:
This person is applicant for the purposes of: All designated the United States all designated the United States	States except	the United States the States indicated in of America only the Supplemental Box
Box No. III FURTHER APPLICANT(S) AND/OR (FURTH	LER) INVENTOR(S)	
Name and address: (Family name followed by given name; for a legal entity The address must include postal code and name of country. The country of the Box is the applicant's State (that is, country) of residence if no State of residence YAO, Minggao WINNERWAY INDUSTRIAL AREA, NANCHENG, DONGGUAN CITY, GUANGDONG PROVINCE, P.R. CHINA Zip Code: 511700	e address indicated in this	This person is: applicant only applicant and inventor inventor only (If this check-box is marked, do not fill in below.) Applicant's registration No. with the Office
State (that is, country) of nationality:	State (that is, country)	of residence:
This person is applicant for the purposes of: all designated the United States all designated the United States		he United States the States indicated in the Supplemental Box
Further applicants and/or (further) inventors are indicated on	a continuation sheet.	
Box No. IV AGENT OR COMMON REPRESENTATIVE;	OR ADDRESS FOR	CORRESPONDENCE
The person identified below is hereby/has been appointed to act on of the applicant(s) before the competent International Authorities a		gent common representative
Name and address: (Family name followed by given name; for a legal entity The address must include postal code and name of cou	Telephone No. (852)28284688	
CHINA PATENT AGENT (H.K.) LTD. 22/F, Great Eagle Centre 23 Harbour Road, Wanchai	Facsimile No. (852)28271018	
Hong Kong Special Administrative Region	Teleprinter No.	
The People's Republic of China		Agent's registration No. with the Office
Address for correspondence: Mark this check-box where no space above is used instead to indicate a special address to w		

Form PCT/RO/101 (first sheet) (March 2001; reprint July 2003)

See Notes to the request form



Sheet No. ... 2...

Continuation of Box No. III FURTHER APPLICANT(S) AND/OR (FURTHER) INVENTOR(S) If none of the following sub-boxes is used, this sheet should not be included in the request.			
Name and address: (Family name followed by given name; for a legal entity. The address must include postal code and name of country. The country of the Box is the applicant's State (that is, country) of residence if no State of residence SHIRAISHI MASASHI Masashi Flat C, 22/F, Tower 9 Laguna Varde (Phase II A) Hung Hom, Kowloon	e address indicated in this	This person is: applicant only applicant and inventor inventor only (If this check-box is marked, do not fill in below.)	
Hong Kong Special Administrative Region P. R. of China		Applicant's registration No. with the Office	
State (that is, country) of nationality:	State (that is, country) of residence:	
This person is applicant all designated for the purposes of:	States except tees of America	the United States of America only the Supplemental Box	
Name and address: (Family name followed by given name; for a legal enting The address must include postal code and name of country. The country of the Box is the applicant's State (that is, country) of residence if no State of residence is the applicant of the state of the stat	e address indicated in this	This person is: applicant only applicant and inventor inventor only (If this check-box is marked, do not fill in below.) Applicant's registration No. with the Office	
State (that is, country) of nationality:	State (that is, country,) of residence:	
This person is applicant for the purposes of: all designated the United States	States except tes of America	the United States of America only the States indicated in the Supplemental Box	
Name and address: (Family name followed by given name; for a legal entity The address must include postal code and name of country. The country of the Box is the applicant's State (that is, country) of residence if no State of residence	e address indicated in this	This person is: applicant only applicant and inventor inventor only (If this check-bax is marked, do not fill in below.) Applicant's registration No. with the Office	
State (that is, country) of nationality:	State (that is, country)	of residence:	
This person is applicant all designated for the purposes of: all designated the United States		the United States the States indicated in the Supplemental Box	
Name and address: (Family name followed by given name; for a legal entity The address must include postal code and name of country. The country of the Box is the applicant's State (that is, country) of residence if no State of residence	e address indicated in this	This person is: applicant only applicant and inventor inventor only (If this check-box is marked, do not fill in below.) Applicant's registration No. with the Office	
State (that is, country) of nationality:	State (that is, country)	of residence:	
This person is applicant all designated all designated for the purposes of: States all designated the United Sta		the United States the States indicated in the Supplemental Box	
Further applicants and/or (further) inventors are indicated on	another continuation	sheet.	



Sheet No. . . . 3

Box No. V DESIGNATION OF STATES	Mark the applicable check-boxes below; at least one must be marked.			
The following designations are hereby made und	er Rule 4.9(a):			
Regional Patent				
AP ARIPO Patent: GH Ghana, GM C	Gambia, KE Kenya, LS Lesotho, MW Malawi, MZ Mozambique, SD Sudan,			
SL Sierra Leone, SZ Swaziland, TZ Ur	nited Republic of Tanzania, UG Uganda, ZM Zambia, ZW Zimbabwe, and any other			
State which is a Contracting State of the	ne Harare Protocol and of the PCT (if other kind of protection or treatment desired,			
	zerbaijan, BY Belarus, KG Kyrgyzstan, KZ Kazakhstan, MD Republic of Moldova,			
LJ EA Eurasian Patent: AM Armenia, AZ A RU Russian Federation, TJ Tajikistan,	TM Turkmenistan, and any other State which is a Contracting State of the Eurasian			
Patent Convention and of the PCT	Patent Convention and of the PCT			
🔲 EP European Patent: AT Austria, BE Be	gium, BG Bulgaria, CH & LI Switzerland and Liechtenstein, CY Cyprus, CZ Czech			
Republic, DE Germany, DK Denmark	Republic, DE Germany, DK Denmark, EE Estonia, ES Spain, FI Finland, FR France, GB United Kingdom, GR Greece,			
SI Slovenia, SK Slovakia, TR Turkev	HU Hungary, 1E Ireland, IT Italy, LU Luxembourg, MC Monaco, NL Netherlands, PT Portugal, RO Romania, SE Sweden, SI Slovenia, SK Slovakia, TR Turkey, and any other State which is a Contracting State of the European Patent Convention			
and of the PCT	·			
OA OAPI Patent: BF Burkina Faso, BJ	Benin, CF Central African Republic, CG Congo, CI Côte d'Ivoire, CM Cameroon,			
CA Gabon GN Guinea GO Equatori	al Guinea, GW Guinea-Bissau, ML Mali, MR Mauritania, NE Niger, SN Senegal,			
TD Chad, TG Togo, and any other State	which is a member State of OAPI and a Contracting State of the PCT (if other kind cify on dotted line)			
National Patent (if other kind of protection or				
AE United Arah Emirates	HR Croatia OM Oman			
AG Antigua and Barbuda	HU Hungary D PG Papua New Guinea			
MAI Albania	ID Indonesia PH Philippines			
□ AM Armenia	IL Israel DPL Poland			
AT Austria	IN India			
AU Australia	IS Iceland			
☐ AZ Azerbaijan ☐ BA Bosnia and Herzegovina	JP Japan La Ro Russian redefadoi:			
	KG Kyrgyzstan			
BG Bulgaria	KP Democratic People's Republic			
☐ BR Brazil	of Korea			
□ RV Belanic	KR Republic of Korea			
	KZ Kazakhstan			
Li Cil Cunada	LC Saint Lucia			
☐ CH & L1 Switzerland and Liechtenstein ☐ CN China				
CO Colombia	LS Lesotho			
☐ CR Costa Rica	LT Lithuania			
CU Cuba	LU Luxembourg			
CZ Czech Republic	LV Latvia TT Trinidad and Tobago			
☐ DE Germany	MA Morocco			
	MD Republic of Moldova			
DM Dominica	MG Madagascar			
☐ EC Ecuador □	MK The former Yugoslav Republic of US United States of America			
☐ EE Estonia	Macedonia			
ES Spain	MN Mongolia UZ Uzbekistan			
	MWMalawi			
	MX Mexico			
- -	MZ Mozambique			
GH Ghana				
GM Gambia	NZ New Zealand ZW Zimbabwe			
Check-boxes below reserved for designating States which have become party to the PCT after issuance of this sheet:				
Check-boxes below reserved for designating Sta	tes which have become party to the PC1 after issuance of this sheet:			
	It is the designations made shows the applicant also makes under Rule 4 Q(h) all			
Precautionary Designation Statement: In addition to the designations made above, the applicant also makes under Rule 4.9(b) all other designations which would be permitted under the PCT except any designation(s) indicated in the Supplemental Box as being				
excluded from the scope of this statement. The applicant declares that those additional designations are subject to confirmation and that				
any designation which is not confirmed before the expiration of 15 months from the priority date is to be regarded as withdrawn by the				
applicant at the expiration of that time limit. (Confirmation (including fees) must reach the receiving Office within the 15-month time limit.)				



r	<u> </u>	sheet No		
Box No. VI PRIORIT	TY CLAIM	·		
The priority of the follow	ing earlier application(s) is here	by claimed:		
Filing date of earlier application	Number of earlier application		Where earlier application	is:
(day/month/year)	от сатист аррисацоп	national application: country or Member of WTO	regional application:* regional Office	international application receiving Office
item (1)				
item (2)				
item (3)				
item (4)				· · · · · · · · · · · · · · · · · · ·
item (5)				
Further priority claims	s are indicated in the Supplemen	ntal Box.		<u>. </u>
* Where the earlier applicate Industrial Property or one Modern No. VII INTERNATIONAL INTERNATIONAL PROPERTY INTERNATIONAL PROPERTY OF THE PRO	s filed with the Office which for the (1) item (2) tion is an ARIPO application, inadember of the World Trade Orgetting Authority (ISA) (if two te the Authority chosen; the two-lets filed with the t	item (3) item (licate at least one country anization for which that each	(4) item (5) party to the Paris Conven arlier application was file.	other, see Supplemental Box tion for the Protection of d (Rule 4.10(h)(ii)):
ISA / .CN	e ine Authority chosen; the two-to	etter code may be used):	• • • • • • • • • • • • • • • • • • • •	
Request to use results of e International Searching Auth Date (day/month/year)	arlier search; reference to tha hority): Number		rch has been carried out t y (or regional Office)	by or requested from the
Box No. VIII DECLARA	TIONS			
The following declarations check-hoxes below and indicate.	are contained in Boxes Nos. VI	lll (i) to (v) (mark the app er of each type of declarati	plicable ion):	Number of declarations
Box No. VIII (i)	Declaration as to the identity of	of the inventor		:
Box No. VIII (ii)	Declaration as to the applicant's entitlement, as at the international filing date, to apply for and be granted a patent :			
Box No. VIII (iii)	Declaration as to the applicant's entitlement, as at the international filing date, to claim the priority of the earlier application			
Box No. VIII (iv)	Declaration of inventorship (only for the purposes of the designation of the United States of America) :			
Box No. VIII (v)	Declaration as to non-prejudic	ial disclosures or excepti	ons to lack of novelty	:



Sheet No. ...5

Box No. IX CHECK LIST; LANGUAGE OF FILING			
This international application contains: (a) in paper form, the following number of sheets: request (including declaration sheets): description (excluding sequence listings and/or tables related thereto): claims abstract drawings Sub-total number of sheets: (a) in paper form, the following number of sheets: 5 This international application is accompanied by the following item(s) (mark the applicable check-hoxes below and indicate in of iter right column the number of each item): 1. fee calculation sheet 2. original separate power of attorney 3. original general power of attorney 4. copy of general power of attorney; reference number, if any: 5. statement explaining lack of signature 4. priority document(s) identified in Box No. VI as item(s): 7. translation of international application into (language): 8. separate indications concerning deposited microorganism			
Sheets if filed in paper form, whether or not also filed in computer readable form; see (c) helow) Total number of sheets 27			
Figure of the drawings which should accompany the abstract: Fig 3a Language of filing of the international application:			
Box No. X SIGNATURE OF APPLICANT, AGENT OR CONTINUAL REPRESENTATIVE Next to each signature, indicate the name of the person signing and the cappent of the person significant			
For receiving Office use only 1. Date of actual receipt of the purported international application: 2 7 SEP 2003 (2 7 0 9 0 3) 2 Drawings:			
international application: 2 7 SEP 2003 (2 7. 0 9. 0 3) 2. Drawings: 7 Corrected date of actual receipt due to later but timely received papers or drawings completing the purported international application:			
4. Date of timely receipt of the required corrections under PCT Article 11(2):			
5. International Searching Authority (if two or more are competent): ISA / 6. Transmittal of search copy delayed until search fee is paid			
For International Bureau use only Date of receipt of the record copy by the International Bureau:			

Form PCT/RO/101 (last sheet) (January 2003; reprint July 2003)

See Notes to the request form



This sheet is not part of and does not count as a sheet of the international application.

PCT

FEE CALCULATION SHEET Annex to the Request

PCT/CN 03/ 0 0 8 2 4

Applicant's or agent's file reference FPEL03150033	2 7 SEP 2003 (2 7. 0 9. 0 3) Date stamp of the receiving Office
Applicant	
SAE MAGNETICS (H.K.) LTD.	·
CALCULATION OF PRESCRIBED FEES	CNY500 T (MY500.1
1. TRANSMITTAL FEE	
2. SEARCH FEE	CNY1500 S CNY1500,
International search to be carried out by	
(If two or more International Searching Authorities are competent to carry ou search, indicate the name of the Authority which is chosen to carry out the int	t the international ernational search.)
3. INTERNATIONAL FEE	,
Basic Fee	*
Where items (b) and/or (c) of Box No. IX apply, enter Sub-total num	nher of sheets) 27
Where items (b) and (c) of Box No. LX do not apply, enter Total num	
	CHF650 [b] CHF650.
b1 first 30 sheets	<u> </u>
b2 x =	b2
number of sheets fee per sheet in excess of 30	
b3 additional component (only if sequence listings and/or tables re	elated
thereto are filed in computer readable form under Section 801(a or both in that form and on paper, under Section 801(a)(ii)):	a)(1),
	b3
400 x =	103
Add amounts entered at b1, b2 and b3 and enter total at B	В
Designation Fees	
The international application contains1 designations.	
1 x CHF140 = 1	СHF790 D СHF /40.
number of designation fees amount of designation fee	0111700 [2]
payable (maximum 5)	
Add amounts entered at B and D and enter total at I	· · · ·
(Applicants from certain States are entitled to a reduction of 75% international fee. Where the applicant is (or all applicants are) so entitled, to be entered at I is 25% of the sum of the amounts entered at B and D.)	rhe total
4. FEE FOR PRIORITY DOCUMENT (if applicable)	P
()	CN 72000-
5. TOTAL FEES PAYABLE	CNY2000CHF790 CHF 790.
Add amounts entered at T, S, I and P, and enter total in the TOTAL bo	x TOTAL
The designation fees are not paid at this time.	
MODE OF PAYMENT	
authorization to charge	cash Coupons
cheque bank draft	revenue stamps other (specify):
AUTHORIZATION TO CHARGE (OR CREDIT) DEPOSIT ACCOL (This mode of payment may not be available at all receiving Offices)	INT Receiving Office: BALENT (HON)
(1 nis mode of payment may not be available at all receiving Offices)	TO THE WAY AND
X Authorization to charge the total fees indicated above.	Deposit Account
(This check-box may be marked only if the conditions for deposit accounts	Date: 09/27/2003 7 7 7 9
of the receiving Office so permit) Authorization to charge any deficiency or credit any overpayment in the total fees indicated above.	Name: 42 × G
Authorization to charge the fee for priority document.	Signature:
• • •	

Form PCT/RO/101 (Annex) (January 2003; reprint July 2003)

See Notes to the fee calculation sheet



15

METHOD AND SYSTEM OF PARTIAL POTTING HEAD SLIDER TO HEAD SUSPENSION

1

Background Information

[0001] The present invention is directed to attaching a slider to a head suspension. More specifically, the present invention pertains to reducing the amount of adhesive needed to couple the slider to the head suspension.

[0002] Figure 1 illustrates a hard disk drive design typical in the art. Hard disk drives 100 are common information storage devices consisting essentially of a series of rotatable disks 104 that are accessed by magnetic reading and writing elements. These data transferring elements, commonly known as transducers, are typically carried by and embedded in a slider body 110 that is held in a close relative position by a suspension attached to an actuator arm 102 over discrete data tracks formed on a disk to permit a read or write operation to be carried out. In order to properly position the transducer with respect to the disk surface, an air bearing surface (ABS) formed on the slider body 110 experiences a fluid air flow that provides sufficient lift force to "fly" the slider 110 (and transducer) above the disk data tracks. The high speed rotation of a magnetic disk 104 generates a stream of air flow or wind along its surface in a direction substantially parallel to the tangential velocity of the disk. The air flow cooperates with the ABS of the slider body 110 which enables the slider to fly above the spinning disk. In effect, the suspended slider 110 is physically separated from the disk surface 104 through this self-actuating air bearing. The ABS of a slider 110 is generally configured on the slider surface facing the rotating disk 104 (see below), and greatly influences its ability to fly over the disk under various conditions.

[0003] Figures 2 a-c illustrates a prior art method for coupling a slider 110 to the suspension of an actuator arm 102. As shown in Figure 2a, a slider fixture 202 is coupled parallel to a suspension 204 at the head end of the actuator arm



102. The slider fixture 202 is connected to a set of pads 206 upon which epoxy or a different adhesive is affixed. A polyimide pattern 208 surrounds the adhesive pads 206 to prevent overflow. A set of electrical suspension bonding pads 210 is electrically coupled to a set of traces 212 that allow the read/write head of the slider to be electrically coupled to a controller. As shown in Figure 2b, adhesive 214 is potted at the adhesive pads 206. The slider 110 is affixed to the slider fixture 202 so that the electrical slider bonding pads 216, allowing electrical access to the read/write head, is lined up with the electrical suspension bonding pads 210. As shown in Figure 2c, the electrical slider bonding pads 216 and the electrical suspension bonding pads 218.

[0004] The described procedure impacts the head gimbal assembly (HGA) dynamic and static characteristics. Additionally, since the epoxy or adhesive has a different Young modulus than the other materials of the HGA, it will shrink or extend as the ambient temperature changes, such as during the curing process. The traditional mounting method of full potting between the slider and the slider fixture can easily change the slider profile, such as the crown, twist, or camber of the head. Using less epoxy or adhesive volume will effect the bonding strength, possibly allowing the slider to separate from the slider fixture. Too much epoxy or adhesive volume can lead to contamination of the surrounding apparatus.



20

Brief Description Of The Drawings

[0005] Figure 1 illustrates a hard disk drive design typical in the art.

[0006] Figures 2a-c illustrates a prior art method for coupling a slider to the suspension of an actuator arm.

5 [0007] Figures 3a-c illustrate a first formed slider fixture according to embodiments of the present invention.

[0008] Figure 4 illustrates alternate embodiments for creating the formed slider fixture according to the present invention.

[0009] Figures 5a-c illustrate a second formed slider fixture according to embodiments of the present invention.

[0010] Figures 6a-b illustrate a third formed slider fixture according to embodiments of the present invention.

[0011] Figures 7a-b illustrate a fourth formed slider fixture according to embodiments of the present invention.

15 [0012] Figures 8a-b illustrate a fifth formed slider fixture according to embodiments of the present invention.

[0013] Figures 9a-b illustrate a sixth formed slider fixture according to embodiments of the present invention.

[0014] Figures 10a-b illustrate in a graph the testing result of the HGA profile change between partial potting and full potting.

Detailed Description

25 [0015] A system and method are disclosed using a formed slider fixture to reduce the amount of adhesive or epoxy needed to couple a slider to a suspension. In this embodiment, the adhesive is applied to the slider fixture or to the slider before coupling. Other methods of coupling besides adhesive may also be used. By redistributing the points of coupling between the slider and the



10

15

20

25

slider fixture, less strain is placed on the coupling points so that less adhesive is needed. Different shapes for the formed slider fixture may be used based on what best supports the slider using the least amount of adhesive. Examples of some, but by no means all, of these shapes can be found in the following descriptions.

[0016] Figures 3a-c illustrate one embodiment of a formed slider fixture. The slider fixture allows a slider to be coupled to the actuator arm of a hard disk drive, such as the hard disk drive shown in Figure 1 and described above. As shown in Figure 3a, a slider fixture 202 has a first side forming plate 302 formed to cover a first side surface 304 of the slider 110. A second side forming plate 306 is formed to cover a second side surface 308 of the slider 110. For the purposes of this description, a forming plate covers a surface when the plate covers the surface for the entire horizontal length of the surface, as first side forming plate 302 covers first side surface 304 in Figure 3. The forming plate need not cover the surface for the entire vertical length in order to cover the surface. Two partial dots 310 of adhesive are applied to the first side surface 304 and second side surface 308 of the slider 110. In one embodiment, instead of two partial dots, a bar-shaped strip of adhesive is placed on the first side surface 304 and the second side surface 308 of the slider 110. The adhesive is an epoxy or a different adhesive material. In the example shown in Figure 3b, the slider 110 is placed between the first side forming plate 302 and the second side forming plate 306 on the slider fixture 202. Ultraviolet radiation or other methods are used to cure the adhesive. Figure 3c illustrates a front view of the slider 110 and the formed slider fixture 202 after curing. After curing, the suspension may then be used to hold the slider 110 over a magnetic disk.

[0017] Figure 4 illustrates alternate embodiments for creating the formed slider fixture. As shown in Figure 4a, a laser 402 is used to bend 404 a stainless steel tongue 202 to create a forming plate 406. Alternatively, as shown in Figure 4b,



10


15

25

a machining tool 408 holds a slider fixture 202 in place while an applied force 410 creates a bend 412 resulting in a forming plate 414.

[0018] Figures 5a-c illustrate an alternate embodiment of a formed slider fixture. As shown in Figure 5a, a slider fixture 202 has a first side forming plate 502 and a second side forming plate 504 formed to partially cover a first side surface 506 of the slider 110. For the purposes of this description, a forming plate partially covers a surface when the plate covers the surface for part of the horizontal length of the surface, as first side forming plate 502 and the second side forming plate 504 partially covers first side surface 506 in Figure 5. A third side forming plate 508 and a fourth side forming plate 510 is formed to partially cover a second side surface 512 of the slider 110. For the purposes of this description, a forming plate partially covers a surface when the plate covers the surface for part of the horizontal length of the surface, as first side forming plate 502 partially covers first side surface 506 in Figure 5. Two partial dots 514 of adhesive are applied to the first side surface 506 and second side surface 512 of the slider 110. The adhesive is an epoxy or a different adhesive material. As shown in Figure 5b, the slider 110 is placed between the first side forming plate 502 and the second side forming plate 504 and the third side forming plate 508 and the fourth side forming plate 510 on the slider fixture 202. Ultraviolet radiation or other methods then cure the adhesive. Figure 5c illustrates a front view of the slider 110 and the formed slider fixture 202 after curing.

As shown in Figure 6a, a slider fixture 202 has a first side forming plate 602 formed to partially cover a first side surface 604 of the slider 110. A second side forming plate 606 is formed to partially cover a second side surface 608 of the slider 110. A third forming plate 610 is formed to cover a third surface 612 of the slider 110. A partial dot 614 of adhesive is applied to the first side surface 604 and second side surface 608 of the slider 110. Two partial dots 616 of adhesive are applied to the third surface 612 of the slider 110. The adhesive is



[0020] Figures 7a-b illustrate a further embodiment of a formed slider fixture. As shown in Figure 7a, a slider fixture 202 has a first side forming plate 702 formed to partially cover a first side surface 704 of the slider 110. A second side forming plate 706 is formed to partially cover a second side surface 708 of the slider 110. A U-shaped forming plate 710 is formed to cover a third surface 712 of the slider 110 and to partially cover the first side surface 704 and the second side surface 708. A partial dot 714 of adhesive is applied to the first side surface 704 and second side surface 708 of the slider 110. Two partial dots 716 of adhesive are applied to the third surface 712 of the slider 110. The adhesive is an epoxy or a different adhesive material. As shown in Figure 7b, the slider 110 is placed between the first side forming plate 702, the second side forming plate 706, and the U-shaped forming plate 710 on the slider fixture 202. Ultraviolet radiation or other methods then cure the adhesive.

As shown in Figure 8a, a slider fixture 202 has a first L-shaped forming plate 802 formed to partially cover a first side surface 804 and a third surface 806 of the slider 110. A second L-shaped forming plate 808 is formed to partially cover a second side surface 810 and a third surface 806 of the slider 110. A partial dot 812 of adhesive is applied to the first side surface 804 and second side surface 810 of the slider 110. Two partial dots 814 of adhesive are applied to the third surface 806 of the slider 110. The adhesive is an epoxy or a different adhesive material. As shown in Figure 8b, the slider 110 is placed between the first L-shaped forming plate 802 and the second L-shaped forming plate 808 on the slider fixture 202. Ultraviolet radiation or other methods then cure the adhesive.



[0022] Figures 9a-b illustrate a further embodiment of a formed slider fixture. As shown in Figure 9a, a slider fixture 202 has a first L-shaped forming plate 902 formed to partially cover a first side surface 904 and a third surface 906 of the slider 110. A second L-shaped forming plate 908 is formed to partially cover a second side surface 910 and a third surface 906 of the slider 110. A first side forming plate 912 is formed to partially cover the first side surface 904 of the slider 110. A second side forming plate 914 is formed to partially cover the second side surface 910 of the slider 110. Two partial dots 916 of adhesive are applied to the first side surface 904 and second side surface 910 of the slider 110. Two partial dots 918 of adhesive are applied to the third surface 906 of the slider 110. The adhesive is an epoxy or a different adhesive material. As shown in Figure 9b, the slider 110 is placed between the first L-shaped forming plate 902 and the first side forming plate 912 and the second L-shaped forming plate 908 and the second side forming plate 914 on the slider fixture 202. Ultraviolet radiation or other methods then cure the adhesive.

[0023] Figures 10a-b illustrate in a graph the testing result of the HGA profile change between the partial potting used with the formed slide-fixture and the full potting used in the prior art. Figure 10a graphs the total crown, or concavity, of the slider against the temperature in degrees Celsius. A first partial potting 1010 and a second partial potting 1020 were tested, as were a first full potting 1030 and a second full potting 1040, with the partial pottings shown to have less variation as the temperature changed. Figure 10b graphs the total camber, or convexity, of the slider against the temperature in degrees Celsius. Again, a first partial potting 1010 and a second partial potting 1020 were tested, as were a first full potting 1030 and a second full potting 1040, with the partial pottings shown to have less variation as the temperature changed.

What is claimed is

1. A suspension assembly, comprising:

a suspension to hold a slider above a data storage medium; and

a slider fixture formed on the suspension to couple with portions of at least two surfaces of the slider other than a surface facing the data storage medium having a set of connecting pads; and

an adhesive substance is applied to the portions between the slider and the slider fixture to couple the slider to the slider fixture.

10

15

20

25

5

- 2. The suspension assembly of claim 1, wherein the adhesive substance is applied as a partial dot on the portion between the slider and the slider fixture.
- 3. The suspension assembly of claim 1, wherein the slider fixture has a first side forming plate formed to cover a first side surface of the slider and a second side forming plate formed to cover a second side surface of the slider.
 - 4. The suspension assembly of claim 1, wherein the slider fixture has a first side forming plate formed to partially cover a first side surface of the slider and a second side forming plate formed to partially cover a second side surface of the slider.
 - 5. The suspension assembly of claim 1, wherein the slider fixture has a third forming plate formed to cover a side surface opposite the surface having connecting pads.
- 6. The suspension assembly of claim 1, wherein the slider fixture has a U-shaped forming plate formed to cover a third side surface of the slider and to partially cover a first side surface and a second side surface of the slider.

7. The suspension assembly of claim 1, wherein the slider fixture has a first L-shaped forming plate formed to partially cover both a first side surface and a third side surface of the slider and a second L-shaped forming plate formed to partially cover both a second side surface and a third side surface of the slider.

5

10

- 8. A magnetic disk drive, comprising:
 - a data storage medium to store data;
 - a slider which has a read/write head;
 - a suspension to hold a slider above a data storage medium;

a slider fixture formed on suspension to couple with portions of at least two surfaces of the slider other than a surface facing the data storage medium or having a set of connecting pads;

an adhesive substance is applied to the portions between the slider and the slider fixture to couple the slider to the slider fixture; and

a controller to control movement of the suspension and operation of the read/write head.

9. The magnetic disk drive of claim 8, wherein the adhesive substance is applied as a partial dot on the portion between the slider and the slider fixture.

20

15

- 10. The magnetic disk drive of claim 8, wherein the slider fixture has a first side forming plate formed to cover a first side surface of the slider and a second side forming plate formed to cover a second side surface of the slider.
- 25 11. The magnetic disk drive of claim 8, wherein the slider fixture has a first side forming plate formed to partially cover a first side surface of the slider and a second side forming plate formed to partially cover a second side surface of the slider.

- 12. The magnetic disk drive of claim 8, wherein the slider fixture has a third forming plate formed to cover a third side surface opposite the surface having connecting pads.
- 13. The magnetic disk drive of claim 8, wherein the slider fixture has a U-shaped forming plate formed to cover a third side surface of the slider and to partially cover a first side surface and a second side surface of the slider.
- 14. The magnetic disk drive of claim 8, wherein the slider fixture has a first Lshaped forming plate formed to partially cover both a first and a third side surface of the slider and a second L-shaped forming plate formed to partially cover both a second and a third side surface of the slider.

15. A method, comprising:

forming a slider which has a read/write head;

forming a suspension to hold a slider;

forming a circuit on the suspension to connect electrically with the slider;

forming a slider fixture on the suspension to couple with portions of at
least two surfaces of the slider other than a surface facing the data storage
medium or having a set of connecting pads;

coupling the slider with the slider fixture by applying an adhesive substance to the slider or the suspension; and

electrically connecting the circuit with the slider.

25

15

ί.

16. The method of claim 15, further comprising applying the adhesive substance as a partial dot on at least one side surface of the slider or on suspension.

17. The method of claim 15, further comprising:

forming a first side forming plate of the slider fixture to partially cover a first side surface of the slider; and

forming a second side forming plate of the slider fixture to partially cover a second side surface of the slider.

- 18. The method of claim 15, further comprising forming a third side forming plate formed to cover a side surface opposite a surface having connecting pads.
- 19. The method of claim 15, further comprising forming a U-shaped forming plate to surround a third side surface of the slider and to partially cover a first side surface and a second side surface of the slider.
- 15 20. The method of claim 15, further comprising:


10


forming a first L-shaped forming plate to partially cover both a first and a third side surface of the slider; and


forming a second L-shaped forming plate to partially cover both a second and a third side surface of the slider.


Abstract

A system and method are disclosed using a formed slider fixture to reduce the amount of adhesive or epoxy needed to couple a slider to a suspension. The adhesive is applied to the slider fixture or to the slider before coupling. In one embodiment, the slider fixture has a side forming plates on both edge sides of the slider. In one embodiment, the slider fixture has a third forming plate on the third side of the slider.

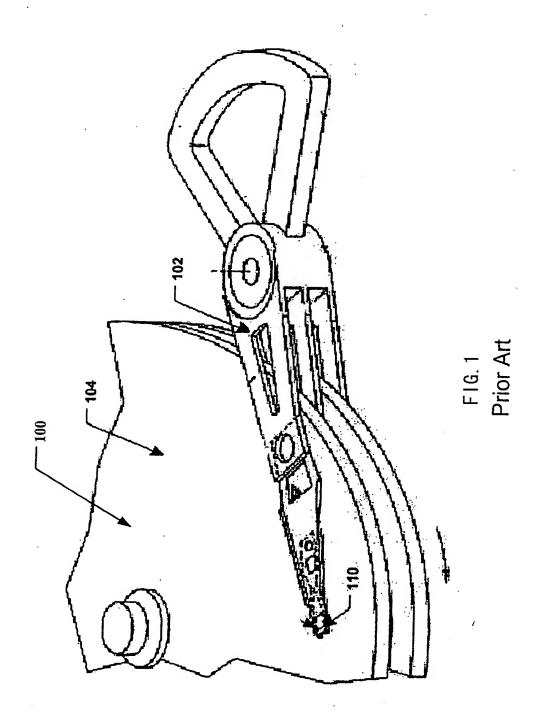




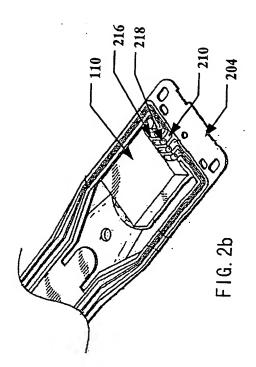

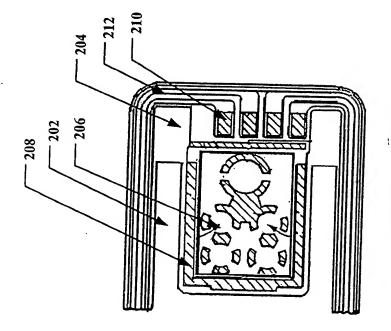



F16. 2a

Prior Art

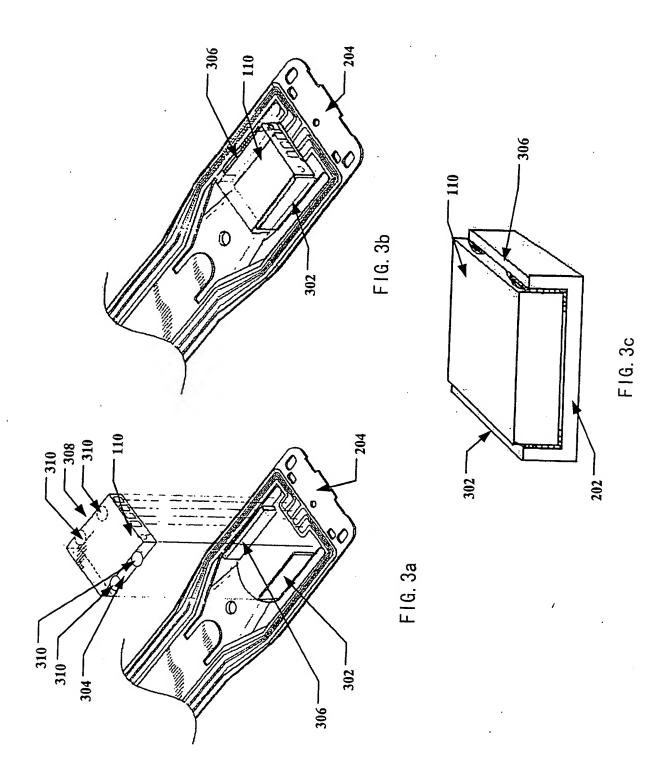



(

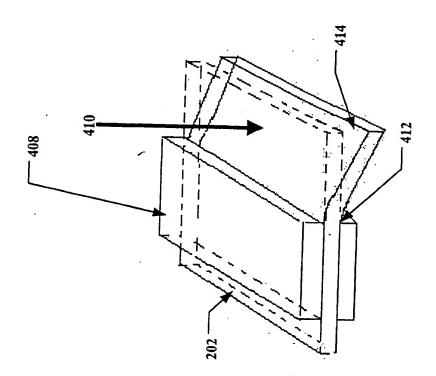

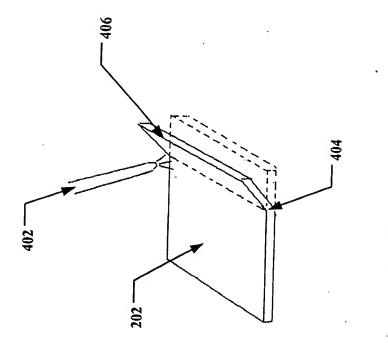


F16. 4a

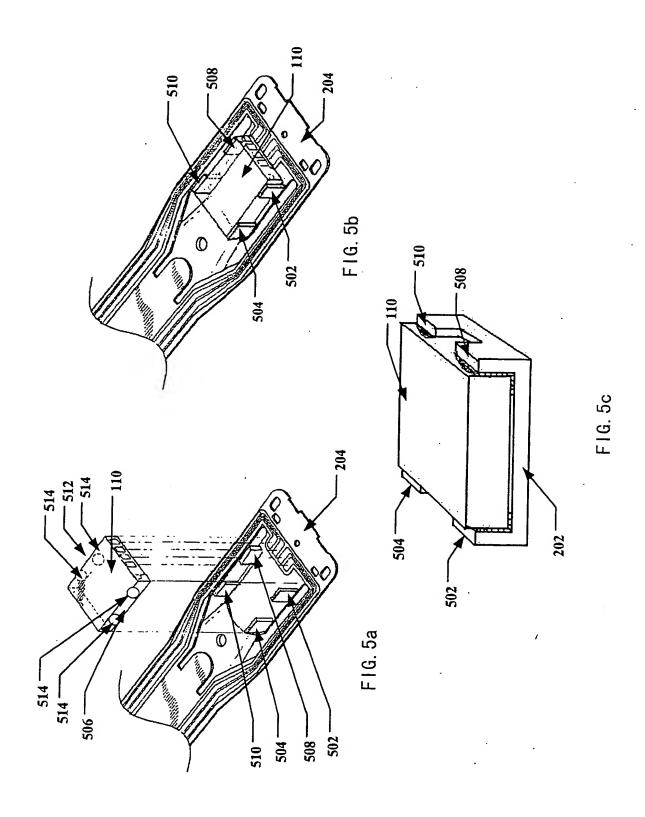


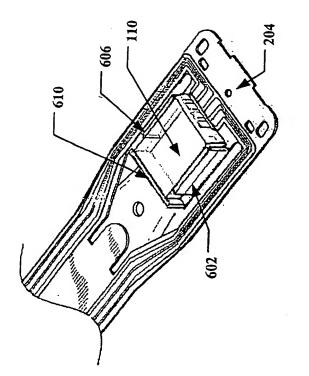


F1G. 6b

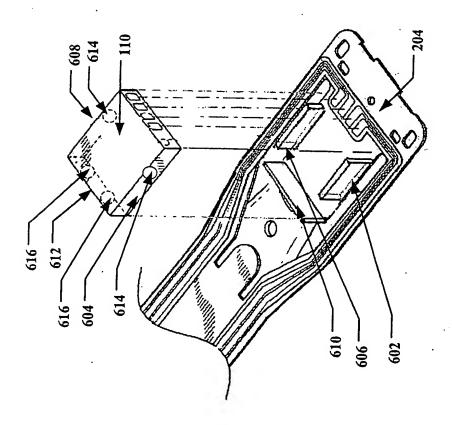


F1G. 6

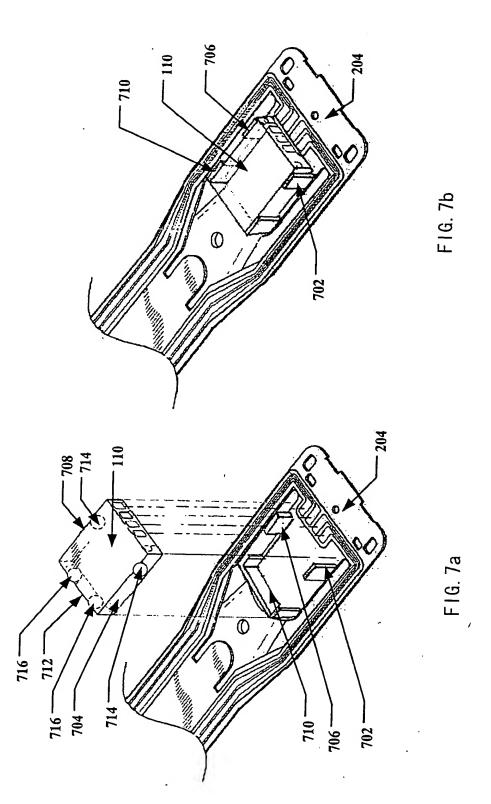






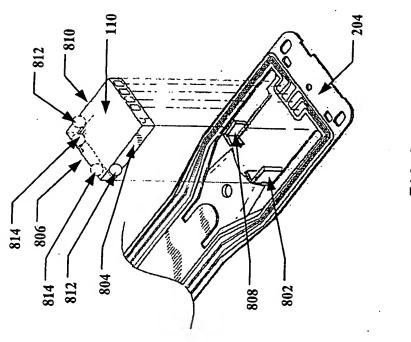


F1G.8a

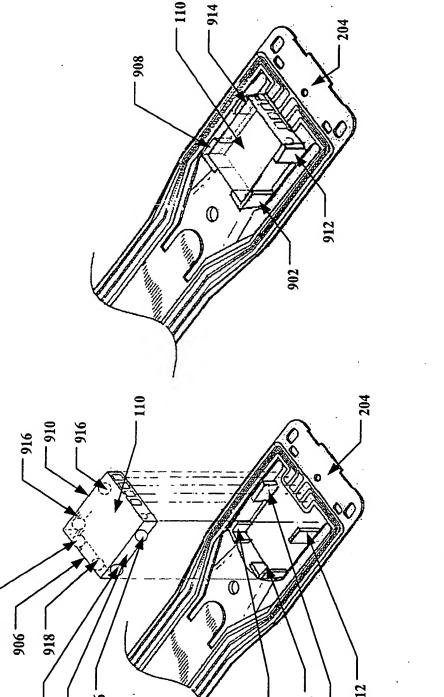


F1G. 9b

F16.9a

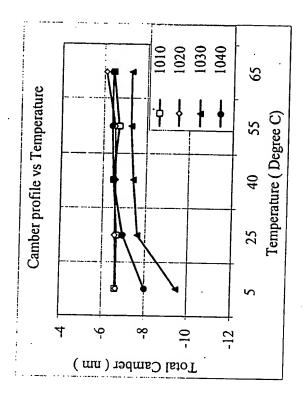

-1G. 10b

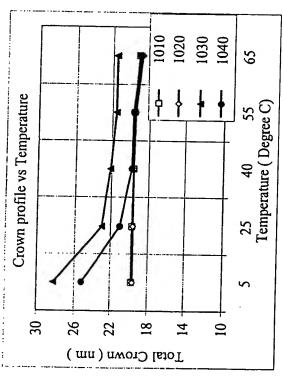

F1G. 10a